



***INSTALLATION MANUAL***

***SINGLE OLED GAUGES***




## Controller box wiring

Zada Tech single OLED range gauges come with a small controller box and a screen. There are a number of ports on the controller box, depending on the type of gauge monitor. The controllers are all equipped with two ports marked "IGN 12V".

In order to power the system up, the + side of the port should be connected to 12V of your ignition and – to a ground or the chassis.


*Please note: we recommend a 2A fuse on the 12v ignition line to the controller box*

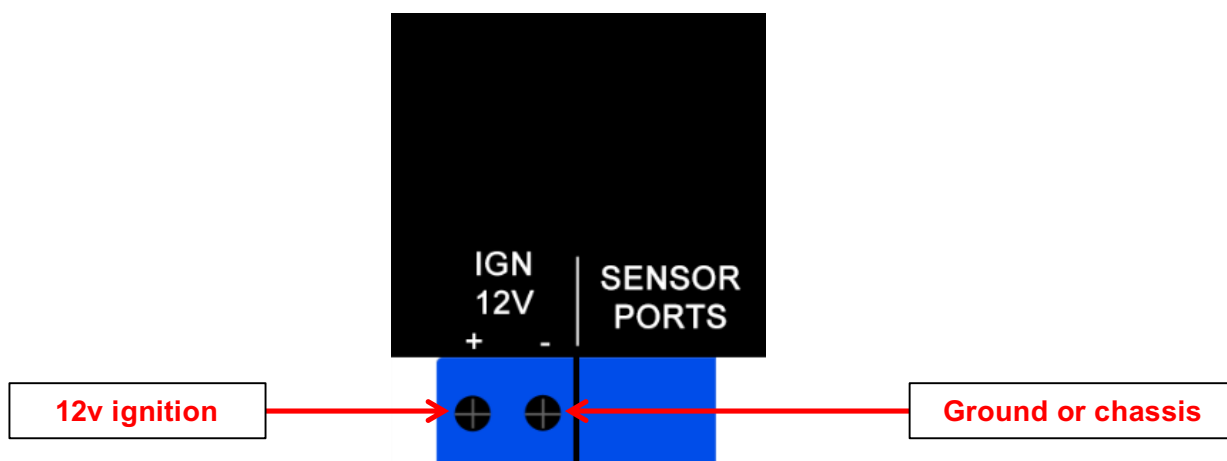

## OLED screen wiring

The OLED screen should be connected, to the controller box, through the ribbon flat cable as per the instructions below.

The marked wire connects to the **GND** pin.

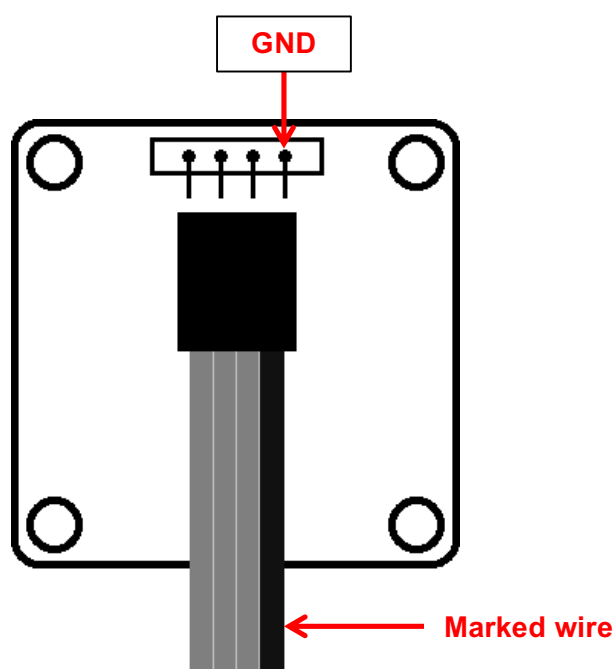



## Sensors

In order to wire the external sensors to the ports correctly please refer to the guide below.

### **Boost/Map sensor**

Red	+
Black	-
White	S

### **Oil/Fuel/Exhaust Pressure sensor**

Red	+
Black	-
Green	S

### **Oil/Water/Trans/Fuel temperature sensor**

Red	+
Black	-

### **EGT sensor**

Yellow	+
Red	-